

DESCRIPTION

Finish Skimcoat is a thin plastering mortar formulated for interior & exterior applications varying from 0-5mm in thickness. It covers minor imperfections, corrects surface unevenness of raw concrete and plastered surfaces to achieve a smooth finish. Finish Skimcoat reduces construction costs by replacing three products - concrete neutralizer, patching compound and basecoat. Finish Skimcoat is a product that is easy to apply and produces superior results

COMPLIED STANDARD

- TCVN 7239:2014
- EN 998, EN 1015

EXCUTION METHOD

Surface preparation

The surface must be fully cured, structurally stable, level, even, clean & free from paint & contaminants such as dirt, dust, loose material, oils & chemicals. Concrete surface must be cured for a minimum of 3 days prior to Finish Skimcoat application. The use of a level bar is essential to ensure levelness and / or plumbness of the surface. For painted surfaces, acid etch or abrade paint to ensure proper bonding. Prior to application, wet substrate well with clean water using a sponge or a roller brush. For outdoor application & during extreme hot weather conditions, such as noon time or summer, wet substrate very well and more frequently before applying skimcoat.

Mixing


In a clean plastic pail, mix clean water with Finish Skimcoat. Mixture should attain a smooth, creamy & lump-free consistency. Use a mixing torque for best results. Mixing time: 2 - 3 minutes. Let mixture rest for 15 mins. Mix again briefly before use.

Application

While the substrate is still damp, apply Finish Skimcoat to desired application thickness (0 - 5mm) using a steel trowel.

Finishing

Finish Skimcoat must receive further finish of paint or sealer as protection. Finish Skimcoat requires a minimum of 3-5 days curing prior to application of primer. This replaces the use of concrete neutralizer

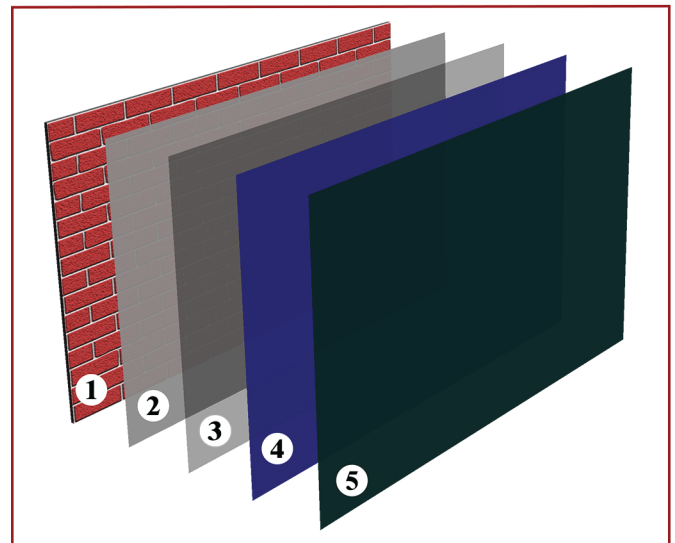

- | | |
|---------------|--------------------|
| 1. Brick Wall | 2. Render |
| 3. Base | 4. Finish SkimCoat |
| 5. Paint | |

ADVANTAGES

Paintable
Crack resistant
Superior bonding
Non-sagging
Corrects unevenness
Quick & Easy application
Economical Indoor & Outdoor

CONSUMPTION

With thickness 1-2mm: 1- 1.8kg/m²
With thickness 3-4mm: 7-8m²

PACKING

Finish Skimcoat is coming 25kg/bag

EXPIRIY DATE

Finish Skimcoat 1 has a shelf life of 06 months in tightly closed original packing.

SPECIFICATIONS

Color	Grey, White
Ratio water	10-11 litter /25kg
Consumption	1-1.2kg/m ² depend on the surface
Thickness	1-2mm per layer
Execution time	2 hours
Adhesive Strength	> 0.5N/mm ²
Average Compressive Strength	>25N/mm

DRYMAS VIETNAM CO., LTD

Head Office 1st Floor, X2 Building, Lane 34, Nghia Do Street, Tay Ho District, Hanoi
Website: www.drymas.vn Email: info@drymas.vn
Hotline: (024). 73013789

Factory Pham Van Dong Street, Cao Minh Village, Phuc Yen City, Vinh Phuc Province

